

Bringing the worlds best chillers to Australia

MODEL:

SG1L-SD

QUICK INFO

Rhino all stainless 1 door solid stainless door bar fridge, with brand name parts and designed by the best engineers, built by a quality long term manufacturer, to bring a reliable product to the market.

Polished Stainless Steel Inner, low energy compressor and German energy efficient EBM fans make unit robust for tough conditions as well as extremely energy efficient.

PARTS AND ENERGY INFO

- Cyclopentane foaming
- German energy saving EBM fans
- LED lighting
- R600 100% ozone safe gas
- Solid Door
- Low Energy Compressor
- Meanwell Transformer From Taiwan
- Philips LED Lighting (Same Factory)



SPECIFICATIONS

Capacity (litres)
Holds (cans)
Noise Level
47
Consumption

Consumption 1.05Kwh/24Hrs Unit dimensions (WxDxH) 500 x 500 x 840

Lockable Yes Gross weight 50 kg




^{**}Specifications and price of this product may change at any time

^{**}For more information about this product please call us or visit our website.



PRODUCT INFORMATION

SG1L-SD

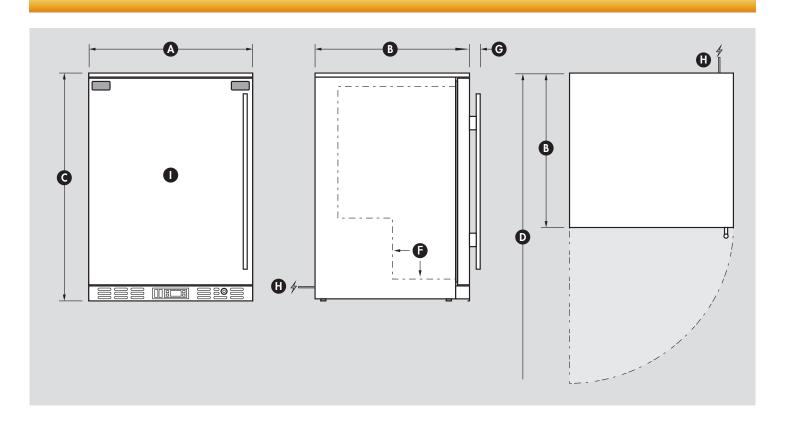

INFORMATION

DIMENSIONS

\bigcirc	Overall width		600mm
B	Overall depth		495mm
(C)	Overall height - includes feet		840mm
(D)	Overall depth with door open		1070mm
Ē	Height of hinge cap (included in	n height above)	N/A
F	Internal step inside unit	190mm In & 190	Omm High
G	Depth of handle (adds to depth	above)	40mm
\oplus	Power cord location & length		1800mm
1	Internal dimensions (WxDxH)	520 x 380 x	680mmH

Note: Door opens maximum 5mm outside diameter

INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH) 620 x 600 x 850mmH Venting type of fridge Front Venting, Through Grill

Note: If wanting a 'cabinet door' in front of fridge door please contact us

OTHER HELPFUL INFORMATION

Height floor to bottom of door

Door size (WxH)

Feet height fully tightened

Height adjustment available on current feet

Change feet size for extra height option

Shelf Qty / Size

2 x (500mmW x 350mmD)

Wine Shelf available (Y/N)

Yes

PERFORMANCE

Cooling Cools easily to (1oC)
Application suitability Commercial / Alfresco / Indoor

Maximum operating ambient temperature 38oC
Outdoor official IP rating IP22
Meps Energy Approved & Food Grade Yes